


HIGH PERFORMANCE HORIZONTAL FLUSH

HH-F / 600 - 1,200 CFM

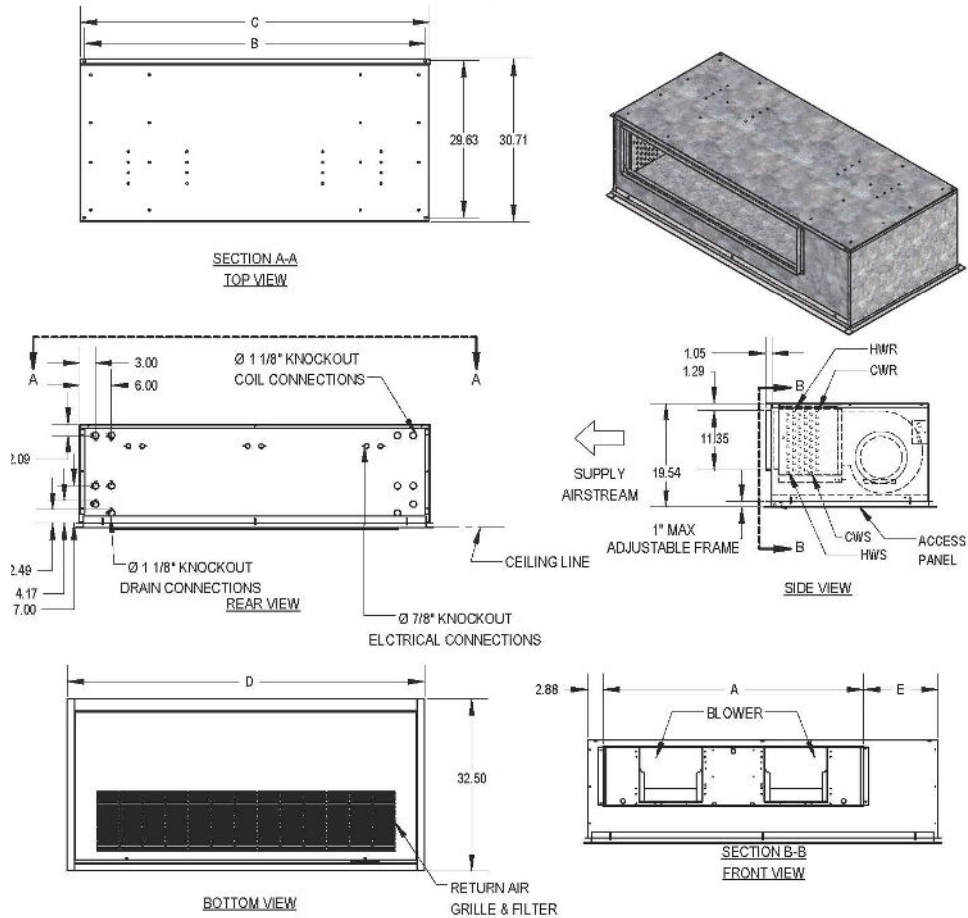


RIGHT HAND SHOWN, LEFT HAND OPPOSITE

MODEL FLUSH	A	B	C	D	FILTER SIZE
600	15-5/16	44-3/8	46	47-1/2	(2) 12 X 20 X 1
800	19-5/16	44-3/8	46	47-1/2	(2) 12 X 20 X 1
1000	25-5/16	44-3/8	46	47-1/2	(2) 12 X 20 X 1
1200	31-5/16	52-3/8	54	55-1/2	(2) 12 X 25 X 1

- All sizes shown in inches.
- Right hand unit shown, left hand unit opposite.
- Coil connections determined by facing the supply air opening.
- Electrical junction box is located on the same side as the coil connections.
- Unit must be installed level and condensate drain lines should be trapped.
- Drain pan is powder coated epoxy with a 1/8" thick closed cell insulation and has 3/4" NPT primary and secondary drain connections.
- Entire cabinet, scroll and blower wheel are heavy gauge, galvanized steel.
- Coil connections: 1/2" CW on HH006, 3/4" on HH008-012 and 1/2" HW on HH006-012.

HIGH PERFORMANCE HORIZONTAL FLUSH

HH-F / 1,500 - 2,200 CFM

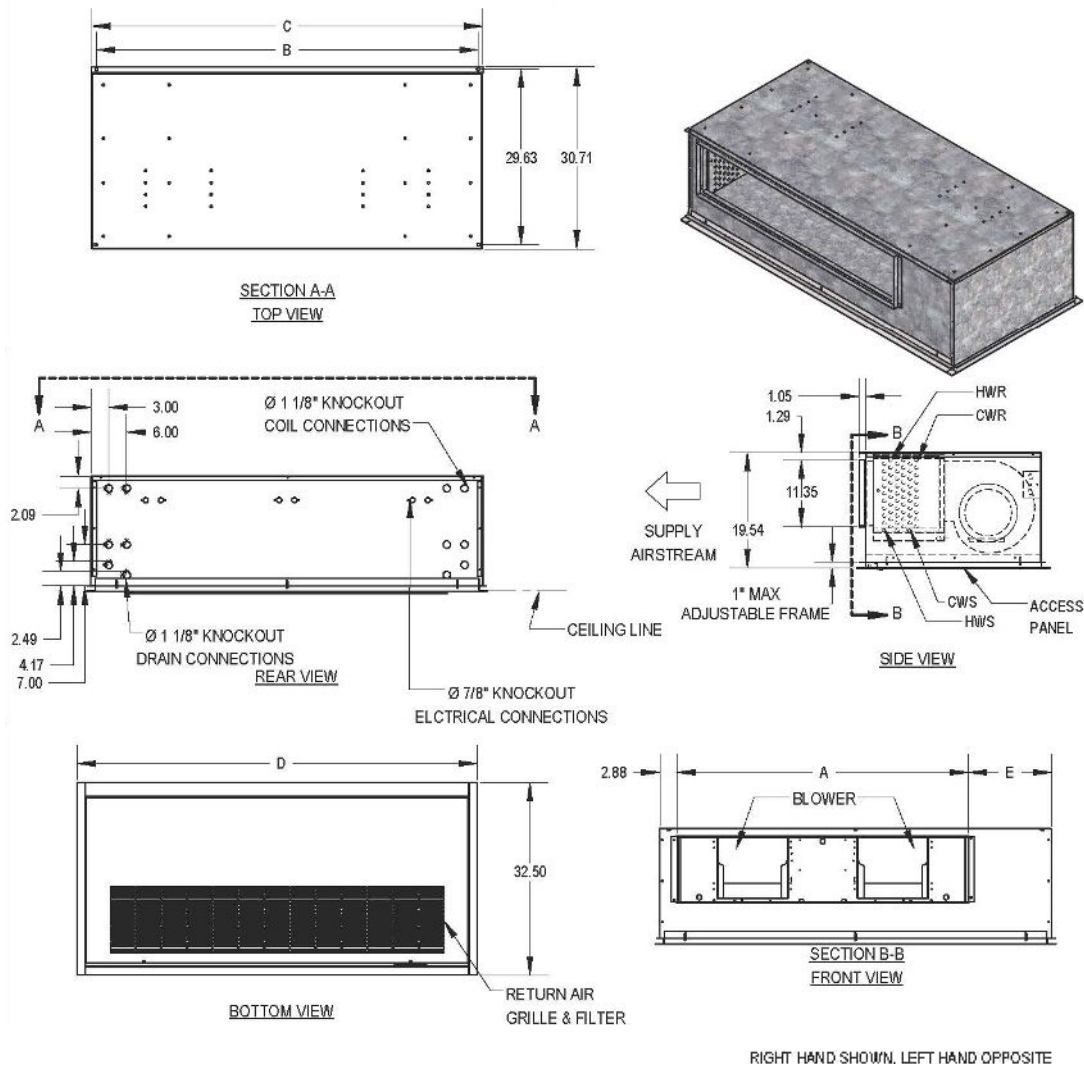

MODEL FLUSH	A	B	C	D	FILTER SIZE
1500	37-5/16	54-3/8	56	57-1/2	(2) 12 X 25 X 1
1800	43-5/16	58-3/8	60	61-1/2	(3) 12 X 20 X 1
2200	49-5/16	64-3/8	66	67-1/2	(3) 12 X 20 X 1

- All sizes shown in inches.
- Right hand unit shown, left hand unit opposite.
- Coil connections determined by facing the supply air opening.
- Electrical junction box is located on the same side as the coil connections.
- Unit must be installed level and condensate drain lines should be trapped.
- Drain pan is powder coated epoxy with a 1/8" thick closed cell insulation and has 3/4" NPT primary and secondary drain connections.
- Entire cabinet, scroll and blower wheel are heavy gauge, galvanized steel.
- Coil connections: 3/4" CW on HH015-022 and 1/2" HW on HH015-022.

WILLIAMS HORIZONTAL FAN COILS 45